

STRATHEARN

— STONE AND TIMBER.CO.UK —


STRATHEARN PRODUCT RANGE SHEET: CLASSIC EUROPEAN OAK FLOORING COLLECTION

The Classic Collection is the original Strathearn oak range - always produced from European oak, which is widely appreciated to be the finest oak available in terms of strength, colouring and natural features. The Classic Collection is supplied unfinished and sanded, with filled knots, ready for finishing. Choose from expertly constructed engineered oak for installation with underfloor heating or structural grade solid oak floorboards to give a flawless fit directly on to joists.

Available in single or mixed plank widths. Also available in Oak Block and Chevron.



Natural Grade

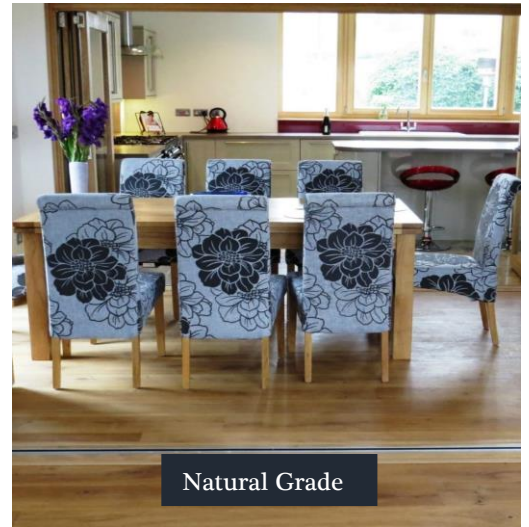

Natural Grade



Prime Grade

CLASSIC UNFINISHED ENGINEERED OAK - PRICE PER M ²				CLASSIC UNFINISHED SOLID OAK - PRICE PER M ²
Width mm	Natural Grade	Prime Grade	Brushed Finish	Natural Grade
	180	180	180	
16mm	£53.50	£65.00	£56.50	Please Enquire
20mm	£62.00	POA	£75.00	

All prices exclude VAT

Lead time variable please check for details

When ordering include 5-10% for wastage and cuts

Please enquire for other board widths available.

Please enquire for installation, finish service and costs.

For our pre-finished flooring please see our Dijon, Alsace, Beaulieu and Chambord ranges

Strathearn Stone & Timber Ltd, The Workshop, Forteviot, Perth PH2 9BT
 01764 684836 | info@stoneandtimber.co.uk | www.stoneandtimber.co.uk
 REV: January 2019

STRATHEARN

— STONE AND TIMBER.CO.UK —

TECHNICAL INFORMATION	Solid 20mm	Engineered 16 mm	Engineered 20 mm
Suitable for use with underfloor heating	*	✓	✓
Kiln dried to a moisture content 8-12%	✓	✓	✓
Solid oak top layer thickness	20 mm	4 mm	6 mm
End-matched timber (tongue and groove on 4 sides)	✓	✓	✓
Random lengths up to 2.4m (for 20mm Eng. up to 3m)	✓	✓	✓
Micro-bevelled** edges on long sides	✓	✓	✓
Surface sanded & knots filled	✓	✓	✓
Structural grade – install directly onto joists ≤ 400mm centres	✓		✓
Structural grade - install directly onto joists ≤ 600 mm centres	✓		
Installation by secret nail onto suitable timber subfloor	✓		✓
Installation by gluing directly onto subfloor	***	✓	✓
Installation as floating floor – room area ≤ 30m ² , room width ≤ 4.5m		✓	✓

* Solid oak flooring up to 130 mm thick can be used over underfloor heating if fully bonded to the subfloor.

** Square edges available on request.

*** Board width < 160mm onto concrete and < 180mm onto chipboard.

GRADES

Natural Grade: Healthy sound & black knots up to 60mm, open filled knots, end cracks filled, sapwood up to 1/3 of width.

Prime Grade: Healthy sound knots up to 10mm. Black pin knots to 5mm. Sapwood up to 5% of board.

STORAGE & ACCLIMATISATION

We recommend that our solid oak flooring is delivered at least two weeks before fitting to allow the timber to acclimatise. For engineered oak allow a period of 48 hours. During the recommended acclimatisation period, all oak must be stored flat in the area where installation is planned, and room temperature and humidity levels should be as per normal living conditions.

CLEANING

- An oil finish on oak floors should be left after application to 'cure' for 10-14 days before using any cleaning or care products.
- Sweep, vacuum or dust oak floors regularly. Micro-fibre mops are ideal for wood floors however dampen mop slightly rather than saturating. We recommend using Osmo Wash and Care cleaner or Osmo Spray Mop.
- Always wipe accidental spills immediately using a soft, slightly damp cloth.

REPAIRING & REFRESHING

Light scratches and marks on oiled floors can be easily removed with gentle sanding and careful re-application of our recommended oil finish.

PROTECTING

The key to a beautiful, long lasting and hardwearing oak floor is a stable environment. Extremes of temperature and humidity cause wood to shrink and leave unwanted spaces between boards, while excessive humidity warps wood creating a 'waved' appearance. To keep your oak floor in 'just laid' condition, follow these simple rules.

- Maintain consistent room humidity between 35% and 65%.
- Keep underfloor heating switched on all year round.
- Do not place heavy rugs on oak floors with underfloor heating.
- Place felt floor pads under furniture for damage-free moving.
- Avoid walking on oak floors with stiletto heels, golf spikes and cleats. Clip pets' claws to prevent scratches.
- Never place potted plants directly onto oak floors.